

TEFCOLD 

# Coolers

Bottle / Display Coolers | Can Coolers | Back Bars



TEFCOLD

# BOTTLE display coolers

In this section you will find some of our most popular items. The glass door merchandisers are among our best selling products because of the timeless design and functionality.

Most products in this section are well-suited for branding. Available with glass door or solid door, with or without canopy and in several different sizes, this range offers many combinations. All units are designed to work in a hot environment. For the FS/SCU series matching freezers are available.

Chest Bottle Coolers can also be found in this section, page 60



### Did you know?

You can find our eco-friendly bottle cooler GBC - with or without canopy - on pages 34-35.





## » Bottle Coolers



**BC25CP**

- LED light
- Fan assisted cooling
- Glass door
- 2 Fixed shelves
- Adjustable feet



**FS80CP**

- Illuminated Canopy
- Fan assisted cooling
- Glass door
- 2 Fixed shelves
- Adjustable feet



**FSC100**

- Illuminated Canopy
- Fan assisted cooling
- Self-Closing Sliding Glass door
- 3 Adjustable shelves
- Brackets for wall-hanging
- Adjustable feet

### Technical specifications

Model	BC25CP	FS80CP	FS80CP	FSC100
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	25	60	64	100
Net Volume, l	22	45	55	60
Cans, 330 ml	18	48	114	96
Cans, 500 ml	18	48	86	64
Bottles, 500 ml	-	-	66	64
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	320x420x118	455x490x270	480x490x440	605x590x430
Internal Dimensions, WxDxH	280x370x173	315x370x440	410x380x500	560x560x325
Doors	1 hinged glass	1 hinged glass	1 hinged self closing glass	2 sliding glass
Shelves/Baskets	2	2, 395x265	2, 400x260	2, 560x210
Outer Body	Black/grey	White	White	White
Interior	Aluminium	ABS	ABS	ABS
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet/Wall
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	75	80	215	220
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	26	37	43	51
Net Weight, kg	23	32,5	37,5	45,5
Noise Level, dB(A)	44	44	42	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	50	80	90	115
Internal Light	LED	8 W neon	15 W Neon	15 W Neon
Canopy Light	LED	8 W Neon	15 W Neon	15 W Neon
Options: Charged with R600a		☑	☑	☑

## » Bottle Coolers



**BC85 / 145**

- Interior LED light
- Curved glass door
- 3 Adjustable shelves
- Adjustable feet



**BC30**

- LED light
- Fan assisted cooling
- Glass door
- 1 Fixed shelf
- 1 Adjustable shelf
- Adjustable feet



**BC60**

- LED light
- Fan assisted cooling
- Glass door
- 1 Fixed shelf
- 2 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	BC30	BC60	BC85	BC145	BC145 w/fan
Climate Class	N	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	32	67	92	105	105
Net Volume, l	20	58	85	105	105
Cans, 330 ml	20	20	101	138	138
Cans, 500 ml	55	55	70	89	89
Bottles, 330 ml	-	-	64	78	78
Bottles, 1,5 l PET	-	-	22	27	27
External Dimensions, WxDxH	358x408x891	432x498x888	503x502x775	503x500x850	503x500x850
Internal Dimensions, WxDxH	280x271x380	336x311x557	410x415x630	410x415x710	410x415x710
Doors	1 hinged glass	1 hinged glass	1 curved glass	1 curved glass	1 curved glass
Shelves/Baskets	2	3	3	3	3
Outer Body	Black	Black	White	White	White
Interior	ABS	ABS	ABS	ABS	ABS
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	67	80	75	122	122
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	24,8	36,7	35	38	38
Net Weight, kg	22,2	32,5	33	36	36
Noise Level, dB(A)	44	44	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Static	Static	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	Digital	Digital	Digital
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	45	50	80	80	80
Internal Light	LED	LED	LED	LED	LED

## » Bottle Coolers



Option: LED light

### CEV425CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet



### CEV425

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet



New strong handle

### Technical specifications

Model	CEV425	CEV425CP
Climate Class	N	N
Temperature Range, °C	2 to 10	2 to 10
Gross Volume, l	374	374
Net Volume, l	350	350
Cans, 330 ml	455	455
Cans, 500 ml	301	301
Bottles, 330 ml	217	217
Bottles, 0,5 l PET	217	217
External Dimensions, WxDxH	595x600x1840	595x600x1880
Internal Dimensions, WxDxH	520x450x1595	520x450x1595
Doors	1 glass	1 glass
Shelves/Baskets	4, 515x405	4, 515x405
Outer Body	White	White
Material	ABS	ABS
Castors/Foot	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	84,9	80,1
Net Weight, kg	75,5	80,4
Noise Level, dB(A)	45	45
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R134a	R134a
Charge, g	200	200
Internal Light	15 W Neon	15 W Neon
Canopy Light	N	15 W Neon
Option: Charged with R600a		



## » Bottle Coolers



2 doors on model FS1380

### FS1380

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



### FS1280

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet



### FS1220

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	FS1220	FS1280	FS1380	FS2380
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	382	455	448
Cans, 500 ml	175	258	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1315	595x600x1835	595x600x1840	595x600x1840
Internal Dimensions, WxDxH	470x450x887	470x450x1347	470x450x1352	470x450x1352
Doors	1 glass	1 glass	1 glass	2 glass
Shelves/Baskets	3, 490x380	4, 490x380	5, 490x380	5, 490x380
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Foot	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	229	260	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	84,4	79,3	84,9	84,9
Net Weight, kg	56,3	70	75,5	75,5
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				



## » Bottle Coolers



FSC1380

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



2 doors on model FSC2380



FSC1220

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



FSC1280

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	FSC1220	FSC1280	FSC1380	FSC2380
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	382	455	448
Cans, 500 ml	175	250	301	294
Bottles, 330 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1455	595x600x1775	595x600x1980	595x600x1980
Internal Dimensions, WxDxH	470x450x1047	470x450x1367	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	1 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Material	ABS	ABS	ABS	ABS
Castors/Foot	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	230	260	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	71,4	83,3	90,1	90,1
Net Weight, kg	62,5	74	80,4	80,4
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Canopy Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				

## » Bottle Coolers



GBC 375CP

- LED illuminated canopy
- Fan assisted cooling
- Internal LED light
- Reversible glass door
- Strong handle
- 5 Adjustable shelves
- Adjustable feet



GBC 375

- Fan assisted cooling
- Internal LED light
- Reversible glass door
- Strong handle
- 5 Adjustable shelves
- Adjustable feet



Strong handle

### Technical specifications

	GBC 375	GBC 375CP
Climate Class	N-T	N-T
Temperature Range, °C	2 to 16	2 to 16
Gross Volume, l	372	372
Net Volume, l	347	347
Cans, 330 ml	455	455
Cans, 500 ml	361	361
Bottles, 330 ml	217	217
Bottles, 0,5 l PET	217	217
External Dimensions, WxDxH	595x600x1840	595x600x1840
Internal Dimensions, WxDxH	470x450x1552	470x450x1552
Doors	1 glass	1 glass
Shelves/Baskets	5	5
Outer Body	White	White
Material	ABS	ABS
Castors/Feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	85	91
Net Weight, kg	76	82
Noise Level, dB(A)	40	40
Type of Cooling	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic
Controller	Mechanical	Mechanical
Thermometer	Y	Y
Refrigerant	R600a	R600a
Charge, g	80	80
Internal Light	LED	LED
Canopy Light		





## » Bottle Coolers



FSC1380CURVED

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Curved Glass door
- Integrated handle
- 5 Adjustable shelves
- Adjustable feet



FSC1450

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Glass door
- 5 Adjustable shelves
- Adjustable feet



SCU1450CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Glass door
- 5 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	FSC1380CURV	FSC1450	SCU1450CP
Climate Class	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	300	438	438
Net Volume, l	347	374	374
Cans, 330 ml	455	720	720
Cans, 500 ml	301	486	486
Bottles, 330 ml	217	360	360
Bottles, 0,5 l PET	217	360	360
External Dimensions, WxDxH	595x25x1980	680x45x2090	680x45x2090
Internal Dimensions, WxDxH	470x450x1652	560x485x1515	560x485x1515
Doors	1 glass	1 glass	1 glass
Shelves/Baskets	5, 495x448	5, 574x405	5, 574x405
Outer Body	White	White	White
Material	ABS	ABS	ABS
Castors/Foot	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	262	260	260
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	98	105	105
Net Weight, kg	90	97	97
Noise Level, dB(A)	45	49	49
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	200	200	200
Internal Light	15 W Neon	36 W Neon	36 W Neon
Canopy Light	15 W Neon	10 W Neon	10 W Neon
Options: Charged with R600a			



## » Bottle Coolers



2 doors on model SCU2375

### SCU1375

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



### SCU1220

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



### SCU1280

- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	SCU1220	SCU1280	SCU1375	SCU2375
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	382	455	448
Cans, 500 ml	175	259	301	294
Bottles, 500 ml	133	175	217	210
Bottles, 0,5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1315	595x600x1835	595x600x1840	595x600x1840
Internal Dimensions, WxDxH	470x450x1025	470x450x1347	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	2 glass
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360	5, 490x360
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Foot	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	229	260	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	64,4	79,3	84,9	84,9
Net Weight, kg	56,3	70	75,5	75,5
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Option: Charged with R600a				



# » Bottle Coolers



2 doors on model SCU2375CP

### SCU1375CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 5 Adjustable shelves
- Adjustable feet



### SCU1220CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 3 Adjustable shelves
- Adjustable feet



### SCU1280CP

- Illuminated canopy
- Fan assisted cooling
- Internal light
- Reversible Glass door
- 4 Adjustable shelves
- Adjustable feet

## Technical specifications

Model	SCU1220CP	SCU1280CP	SCU1375CP	SCU2375CP
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	215	290	372	372
Net Volume, l	190	260	345	345
Cans, 330 ml	301	382	455	448
Cans, 500 ml	175	259	351	294
Bottles, 330 ml	133	175	217	210
Bottles, 0.5 l PET	133	175	217	210
External Dimensions, WxDxH	595x600x1455	595x600x1775	595x600x1980	595x600x1980
Internal Dimensions, WxDxH	470x450x1025	470x450x1247	470x450x1552	470x450x1552
Doors	1 glass	1 glass	1 glass	1 glass
Shelves/Baskets	3, 490x380	4, 490x380	5, 490x380	5, 490x380
Outer Body	White	White	White	White
Interior	ABS	ABS	ABS	ABS
Castors/Foot	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	280	260	265	265
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	71,4	83,3	90,1	90,1
Net Weight, kg	62,5	74	80,4	80,4
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	90	180	200	200
Internal Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Canopy Light	15 W Neon	15 W Neon	15 W Neon	15 W Neon
Options: Charged with R600a				

## » Bottle Coolers



- FSC1450 Sub Zero**
- Jumbo display thermometer
  - Illuminated canopy
  - Fan assisted cooling
  - Internal light
  - 5 Adjustable shelves
  - Adjustable feet



- FS80CP Sub Zero**
- Jumbo display thermometer
  - Illuminated canopy
  - Fan assisted cooling
  - Self-Closing heated glass door
  - 2 Adjustable shelves
  - Adjustable feet

### Technical specifications

Model	FS80CP/SUB ZERO	FSC1380/SUB ZERO	FSC1450/SUB ZERO
Climate Class	N-T	N-T	N-T
Temperature Range, °C	-2,5 to 5	-2,5 to 5	-2,5 to 5
Gross Volume, l	81	372	438
Net Volume, l	55	345	374
Cans, 330 ml	60	364	480
Cans, 500 ml	40	196	324
Bottles, 500 ml	48	181	272
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	480x800x840	595x600x1880	680x695x2090
Internal Dimensions, WxDxH		470x580x1552	580x680x1515
Doors	1 hinged self-closing glass	1 glass	1 glass
Shelves/Baskets	2, 400x260	5, 490x360	5, 574x405
Outer Body	White	White	White
Material	ABS	ABS	ABS
Castors/Foot	4 adjustable feet	2 rollers and 2 feet	2 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	265	265	427
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	43	90,1	105
Net Weight, kg	37,5	80,4	97
Noise Level, dB(A)	42	45	48
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Electronic	Electronic	Electronic
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	200	200
Internal Light	15 W Neon	15 W Neon	38 W Neon
Canopy Light	15 W Neon	15 W Neon	18 W Neon

## » Display Coolers



**FS1200S**

- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 5 Adjustable shelves
- Adjustable feet



**FSC1000S**

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet



**FSC1200S**

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	FS1000S	FS1200S	FSC1000S	FSC1200S
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	800	880	771	865
Net Volume, l	720	882	691	847
Cans, 330 ml	1198	1472	1144	1408
Cans, 500 ml	754	928	728	896
Bottles, 330 ml	546	672	520	640
Bottles, 0,5 l PET	546	672	520	640
External Dimensions, WxDxH	1000x795x2010	1200x795x2010	1000x740x2010	1200x740x2010
Internal Dimensions, WxDxH	880x570x1555	1080x570x1555	880x570x1533	1080x570x1533
Doors	2 sliding glass	2 sliding glass	2 sliding glass	2 sliding glass
Shelves/Baskets	5, 870x475	5, 1070x475	5	5
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Foot	4 rollers	4 rollers	4 rollers	4 rollers
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	670	740	760	850
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	176	189	175	188,5
Net Weight, kg	163	174	162	174
Noise Level, dB(A)	43	43	43	43
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	450	450	450	450
Internal Light	36 W Neon	36 W Neon	36 W Neon	36 W Neon
Canopy Light	N	N	30 W Neon	30 W Neon



## » Display Coolers



**FSC1000H**

- Internal vertically light
- Ventilated cooling
- 2 hinged glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet



**FSC1200H**

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 hinged glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet



**FSC1950S**

- Illuminated canopy
- Internal vertically light
- Ventilated cooling
- 2 sliding glass doors
- 1 Bottom shelf
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	FSC1000H	FSC1200H	FSC1950H	FSC1950S
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	796	919	1013	968
Net Volume, l	696	852	871	868
Cans, 330 ml	1287	1584	1020	1020
Cans, 500 ml	819	1058	720	720
Bottles, 500 ml	585	720	560	560
Bottles, 0,5 l PET	585	720	560	560
External Dimensions, WxDxH	1000x760x2010	1200x760x2010	1110x825x2025	1110x825x2025
Internal Dimensions, WxDxH	800x670x1533	1000x670x1533	1000x650x1530	1000x650x1530
Doors	2 hinged glass	2 hinged glass	2 hinged glass	2 sliding glass
Shelves/Baskets	5	5	5	5
Outer Body	White	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Foot	4 rollers	4 rollers	4 rollers	4 rollers
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	760	860	817	817
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	175	188,5	195	195
Net Weight, kg	162	174	175	175
Noise Level, dB(A)	48	48	55	55
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	450	450	900	900
Internal Light	30 W Neon	30 W Neon	30 W Neon	30 W Neon
Canopy Light	30 W Neon	30 W Neon	30 W Neon	30 W Neon

## » Display Coolers



**SLDG800**

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet



**SLDG600**

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet



**SLDG1000**

- Illuminated canopy
- Internal vertically light
- Fan assisted cooling
- 2 sliding glass doors
- 5 Adjustable shelves behind each door
- Adjustable feet

### Technical specifications

Model	SLDG600	SLDG725	SLDG800	SLDG1000
Climate Class	N-T	N-T	N-T	N-T
Temperature Range, °C	2 to 12	2 to 12	2 to 12	2 to 12
Gross Volume, l	593	729	796	927
Net Volume, l	576	673	776	914
Cans, 330 ml	560	655	752	848
Cans, 500 ml	-	-	-	-
Bottles, 330 ml	360	360	476	612
Bottles, 0,5 l PET	360	360	476	612
External Dimensions, WxDxH	800x630x2035	1000x630x2035	1140x630x2035	1300x630x2035
Internal Dimensions, WxDxH	800x500x1440	910x500x1440	1030x500x1440	1200x500x1440
Doors	2 sliding glass	2 sliding glass	2 sliding glass	2 sliding glass
Shelves/Baskets	10, 470x378	10, 470x435	10, 490x485	10, 625x485
Outer Body	White	White	White	White
Interior	Powder coated	Powder coated	Powder coated	Powder coated
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	N, Option	N, Option	N, Option	N, Option
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	560	560	560	1000
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	163	202	203	234
Net Weight, kg	155	194	195	225
Noise Level, dB(A)	50	50	50	50
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	320	325	360	380
Internal Light	36 W Neon	36 W Neon	36 W Neon	36 W Neon
Canopy Light	18 W Neon	18 W Neon	30 W Neon	30 W Neon



## » Bottle Coolers



SD1380

- Fan assisted cooling
- Reversible Solid door
- 5 Adjustable shelves
- Adjustable feet



SD1220

- Fan assisted cooling
- Reversible Solid door
- 3 Adjustable shelves
- Adjustable feet



SD1280

- Fan assisted cooling
- Reversible Solid door
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	SD1220	SD1280	SD1380
Climate Class	N-T	N-T	N-T
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	215	290	372
Net Volume, l	190	260	345
Cans, 330 ml	301	392	455
Cans, 500 ml	195	259	309
Bottles, 330 ml	133	175	217
Bottles, 0.5 l PET	133	175	217
External Dimensions, WxDxH	595x600x1315	595x600x1835	595x600x1940
Internal Dimensions, WxDxH	470x440x1020	470x440x1360	470x440x1545
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360
Outer Body	White	White	White
Interior	ABS	ABS	ABS
Castors/Foot	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	115	165	215
Energy Consumption, kWh/24h	See www.liebfeld.dk	See www.liebfeld.dk	See www.liebfeld.dk
Gross Weight, kg	74	85	94
Net Weight, kg	63	78	86
Noise Level, dB(A)	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Compressor	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	180	200
Internal Light	N	N	N
Option: Charged with R600a			





## » Bottle Coolers



**SDU1220**

- Fan assisted cooling
- Reversible Solid door
- 3 Adjustable shelves
- Adjustable feet



**SDU1280**

- Fan assisted cooling
- Reversible Solid door
- 4 Adjustable shelves
- Adjustable feet



**SDU1375**

- Fan assisted cooling
- Reversible Solid door
- 5 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	SDU1220	SDU1280	SDU1375
Climate Class	N-T	N-T	N-T
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	215	290	372
Net Volume, l	190	260	345
Cans, 330 ml	301	392	455
Cans, 500 ml	195	259	309
Bottles, 330 ml	133	175	217
Bottles, 0.5 l PET	133	175	217
External Dimensions, WxDxH	595x440x1315	595x440x1835	595x440x1940
Internal Dimensions, WxDxH	470x440x1020	470x440x1360	470x440x1545
Doors	1 solid	1 solid	1 solid
Shelves/Baskets	3, 490x360	4, 490x360	5, 490x360
Outer Body	White	White	White
Material	ABS	ABS	ABS
Castors/Foot	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	85	215	175
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	85	94	74
Net Weight, kg	78	86	63
Noise Level, dB(A)	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Compressor	Mechanical	Mechanical	Mechanical
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	90	180	200
Internal Light	N	N	N
Option: Charged with R600a	☑	☑	☑



## » Upright Coolers



- UR200SG**
- Stainless steel cabinet
  - White inner liner
  - Lock fitted as standard
  - Reversible door
  - 3 adjustable shelves
  - Adjustable feet at front, rollers at back
  - Digital thermometer
  - Option: Wheels or adjustable legs



- UR200G**
- White cabinet
  - White inner liner
  - Lock fitted as standard
  - Reversible door
  - 3 adjustable shelves
  - Adjustable feet at front, rollers at back
  - Digital thermometer
  - Option: Wheels or adjustable legs



- UR400G**
- White cabinet
  - White inner liner
  - Lock fitted as standard
  - Reversible door
  - 4 adjustable shelves
  - Adjustable feet at front, rollers at back
  - Digital thermometer
  - Option: Wheels or adjustable legs

### Technical specifications

Model	UR200G	UR200SG	UR400G	UR400SG
Climate Class	N	N	N	N
Temperature Range, °C	0 to 10	0 to 10	0 to 10	0 to 10
Gross Volume, l	130	130	374	374
Net Volume, l	119	119	350	350
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850
Internal Dimensions, WxDxH	510x485x620	510x485x620	510x485x1120	510x485x1120
Doors	1 hinged glass	1 hinged glass	1 hinged glass	1 hinged glass
Shelves/Baskets	3	3	4	4
Outer Body	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS
Castors/Foot	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	230-240/50	230-240/50	230-240/50	230-240/50
Input Power, W	120	120	165	165
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	59	59	94	94
Net Weight, kg	54	54	89	89
Noise Level, dB(A)	40	40	40	40
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	75	75	170	170
Internal Light	LED	LED	LED	LED
Option: Charged with R600a				



# » Upright Coolers



Fan assisted cooling

### UR200S

- Stainless steel cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 3 Adjustable shelves
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs



### UR400

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs



### UR600

- White cabinet
- White inner liner
- Lock fitted as standard
- Reversible door
- 4 Adjustable shelves GN2/1
- Adjustable feet at front, rollers at back
- Fan assisted cooling
- Automatic defrost
- Digital thermometer
- Option: Wheels or adjustable legs

## Technical specifications

Model	UR200	UR200S	UR400	UR400S	UR600	UR600S
Climate Class	N-T	N-T	N-T	N-T	N-T	N-T
Temperature Range, °C	0 to 10	0 to 10	0 to 10	0 to 10	0 to 10	0 to 10
Gross Volume, l	130	130	374	374	599	599
Net Volume, l	119	119	350	350	570	570
Cans, 330 ml	-	-	-	-	-	-
Cans, 500 ml	-	-	-	-	-	-
Bottles, 500 ml	-	-	-	-	-	-
Bottles, 1.5 l PET	-	-	-	-	-	-
External Dimensions, WxDxH	600x600x850	600x600x850	600x600x1850	600x600x1850	770x750x1900	770x750x1900
Internal Dimensions, WxDxH	-	-	-	-	-	-
Doors	1 solid White	1 solid SS430	1 solid White	1 solid SS430	1 solid White	1 solid SS430
Shelves/Baskets	2, 502x440 and 1, 502x211	2, 502x440 and 1, 502x211	3, 502x440 and 1, 502x211	3, 502x440 and 1, 502x211	3, 602x440 and 1, 602x211	3, 602x440 and 1, 602x211
Outer Body	White	SS430	White	SS430	White	SS430
Interior	ABS	ABS	ABS	ABS	ABS	ABS
Castors/Foot	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet	2 rollers and 2 feet
Lock	Y	Y	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	150	150	185	185	200	200
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	49	49	74	74	97	97
Net Weight, kg	44	44	69	69	90	90
Noise Level, dB(A)	40	40	40	40	40	40
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Charge, g	75	75	170	170	210	210
Internal Light	N	N	N	N	N	N
Option: Charged with R600a	☑	☑	☑	☑	☑	☑

## » Upright Coolers



### BC330

- Black cabinet
- Black inner liner
- Lock fitted as standard
- Reversible door
- 5 Adjustable shelves
- Adjustable legs
- Ventilated cooling
- Automatic defrost



Integrated handle



LED light in door as option

### Technical specifications

Model	BC330
Climate Class	N
Temperature Range, °C	2 to 10
Gross Volume, l	356
Net Volume, l	337
Cans, 330 ml	-
Cans, 500 ml	-
Bottles, 330 ml	-
Bottles, 0,5 l PET	-
External Dimensions, WxDxH	635x50x1595-1625
Internal Dimensions, WxDxH	548x425x1140
Doors	1 glass
Shelves/Baskets	5
Outer Body	Black
Interior	Black aluminium
Castors/Foot	4 adjustable feet
Lock	Y
Voltage/Frequency, V/Hz	220-240/50
Input Power, W	260
Energy Consumption, kWh/24h	See <a href="http://www.lbfcold.dk">www.lbfcold.dk</a>
Gross Weight, kg	90
Net Weight, kg	91
Noise Level, dB(A)	45
Type of Cooling	Ventilated
Type of Defrost	Automatic
Controller	Mechanical
Thermometer	N
Refrigerant	R134a
Charge, g	250
Internal Light	LED

## » Chest Bottle Coolers



**USS300YSC Chest Bottle Cooler**

- Sliding glass lids
- Lock
- Double wheels
- Suitable for branding with stickers
- Options: Available with copper evaporator



**USS300SD Chest Bottle Cooler**

- Solid, sliding lids
- Integrated handle
- Strong wheels
- Suitable for branding with stickers
- Options: Available with copper evaporator



**USS300Y**

- Flip-Top solid lids
- Inner liner of stucco aluminium
- 4 castors included
- Options: Available with copper evaporator

### Technical specifications

Model	USS300SD	USS300Y	USS300YSC
Climate Class	N-T	N-T	N-T
Temperature Range, °C	1 to 10	-6 to 10	-6 to 10
Gross Volume, l	298	291	298
Net Volume, l	281	283	281
Cans, 330 ml	400	413	400
Cans, 500 ml	245	245	245
Bottles, 330 ml	245	245	245
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	1020x40x890	1000x70x875	1020x40x890
Internal Dimensions, WxDxH	890x310x843	850x310x842	890x310x843
Doors	2 sliding solid	Flip-Flip solid	2 sliding glass
Shelves/Baskets	-	-	-
Outer Body	White	White	White
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Foot	4 wheels	4 wheels	4 wheels
Lock	N	N	N
Voltage/Frequency, V/Hz	230-240/50	230-240/50	230-240/50
Input Power, W	240	250	240
Energy Consumption, kWh/24h	See <a href="http://www.tfcold.dk">www.tfcold.dk</a>	See <a href="http://www.tfcold.dk">www.tfcold.dk</a>	See <a href="http://www.tfcold.dk">www.tfcold.dk</a>
Gross Weight, kg	60	63	60
Net Weight, kg	53	57	53
Noise Level, dBA	42	42	42
Type of Cooling	Static	Static	Static
Type of Defrost	Manual	Manual	Manual
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	280	280	280
Internal Light	N	N	N

# CAN

## impulse coolers

For increasing the number of impulse sales, we offer can coolers as well as impulse chillers well suited for branding, with a stylish shape that will certainly attract customers.

These mobile products are suitable for shops or for self-service drinks at parties.

The internal fan ensures a fast and even cooling of the beverage and the internal baskets make it easy to load and unload them.



### Did you know?

Please consider how the high quality of the cooler reflects the high quality of the product inside.



## » Can Coolers



### VOC75

- Illuminated canopy
- Internal fan
- Internal baskets
- Fast pull-down of temperature
- Well suited for graphics
- 4 strong castors



### VOC100

- Designed for canned drinks
- Illuminated light-board
- Internal fan
- Fast pull-down of temperature
- Well suited for graphics
- 7 sliding shoes




### VOC70

- Illuminated canopy
- Internal fan
- Internal baskets
- Fast pull-down of temperature
- Well suited for graphics
- 4 strong castors

### Technical specifications

Model	VOC70	VOC75	VOC100
Climate Class, N,SN,ST	N	N	N
Temperature Range, °C	2 to 12	2 to 12	2 to 12
Gross Volume, l	65	65	110
Net Volume, l	57	57	103
Cans, 330 ml	78	78	-
Cans, 500 ml	36	36	-
Bottles, 330 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	Ø57xØ80	Ø57xØ80	Ø60xØ0xØ70
Internal Dimensions, WxDxH	Ø47xØ70	Ø47xØ70	52xØ25xØ70
Doors	N	N	N
Shelves/Baskets	N	N	N
Outer Body	White	White	RAL9006
Material	Powder coated	Powder coated	SAC
Castors/Foot	4 castors	4 castors	7 sliding shoes
Lock	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	211	211	140
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	37	37	31
Net Weight, kg	32	32	29
Noise Level, dB(A)	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Electronic
Thermometer	N	N	Y
Refrigerant	R134a	R134a	R134a
Charge, g	190	190	151
Internal Light	N	N	N
Canopy Light	8 W neon	8 W neon	LED
Options: Charged with R600a			

## » Can Coolers

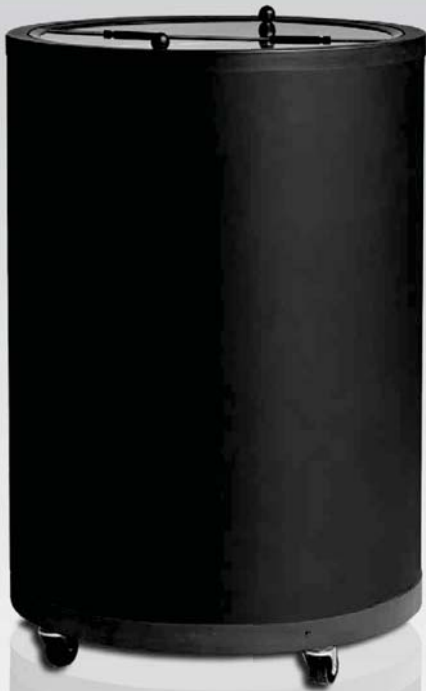

Available in white



Internal fan and basket

### CC77 w/Fan BLACK

- Designed for canned drinks
- Internal fan
- Fast pull-down of temperature
- Internal basket
- Flip-Flop lid
- Well suited for graphics
- 4 strong castors



### CC45 w/Fan

- Designed for canned drinks
- Internal fan
- Fast pull-down of temperature
- Internal basket
- Flip-Flop lid
- Well suited for graphics
- 4 strong castors



### CC55 w/Fan

- Designed for energy drinks
- Internal fan
- Fast pull-down of temperature
- Internal baskets
- Flip-Flop lid
- Well suited for graphics
- 4 strong castors

### Technical specifications

Model	CC45 w/Fan	CC55 w/Fan	CC77 w/Fan	CC77 w/Fan BLACK
Climate Class	N	N	N	N
Temperature Range, °C	0 to 8	0 to 8	0 to 8	0 to 8
Gross Volume, l	53	89	89	89
Net Volume, l	50	79	77	77
Cans, 330 ml	44	84	78	78
Cans, 500 ml	-	42	36	36
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	Ø47x1120	Ø70x1120	Ø96x1120	Ø96x1120
Internal Dimensions, WxDxH	Ø37x470	Ø38x655	Ø45x475	Ø45x475
Doors	Acrylic flip	Acrylic flip	Acrylic flip	Acrylic flip
Shelves/Baskets	1 basket	2 baskets	1 basket	1 basket
Outer Body	Black	White	White	Black
Interior	Powder coated	Powder coated	Powder coated	Powder coated
Castors/Foot	4 castors, 1 lockable	4 castors, 1 lockable	4 castors, 1 lockable	4 castors, 1 lockable
Lock	N	N	N	N
Voltage/Frequency, V/Hz	230-240/50	230-240/50	230-240/50	230-240/50
Input Power, W	163	112	112	112
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	25	32,5	34	34
Net Weight, kg	22	27,5	29	29
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	60	80	95	95
Internal Light	N	N	N	N





TEFCOLD

# BACK BARS counter chillers

The elegant design of both back bar display and counter chillers makes them suitable for most bars and/or restaurants and the cabinets and counters can easily be combined with each other.



**Did you know?**  
Our backbars are offered with both 87 and 90 cm height, with sliding or hinged doors and with different door frames and innerliners.

## » Back Bars



### BA10UF 'Glassfrster'

- Interior LED light
- Ventilated cooling
- Aluminium door frame
- Double glazed door
- 2 Beer glass shelves
- Adjustable feet
- Option: LED illuminated logos



### BA15UF

- Interior LED light
- Ventilated cooling
- Aluminium door frame
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet
- Available medio 2014



LED illuminated logo as option

### Technical specifications

Model	BA10UF	BA15UF
Climate Class	N	N
Temperature Range, °C	-22 to -14	-22 to -14
Gross Volume, l	124	122
Net Volume, l	118	116
Cans, 330 ml	-	-
Cans, 500 ml	-	-
Bottles, 330 ml	-	-
Bottles, 1,5 l PET	-	-
External Dimensions, WxDxH	600x520x950	600x520x970
Internal Dimensions, WxDxH	500x450x722	500x450x720
Doors	1 hinged glass	1 hinged glass
Shelves/Baskets	2, 480x250	2, 480x235
Outer Body	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium
Castors/Foot	4 adjustable feet	4 adjustable feet
Lock	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50
Input Power, W	310	310
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	49	49
Net Weight, kg	47	47
Noise Level, dB(A)	45	45
Type of Cooling	Ventilated assisted	Ventilated assisted
Type of Defrost	Automatic	Automatic
Controller	Mechanical	Mechanical
Thermometer	N	N
Refrigerant	R604a	R604a
Charge, g	130	130
Internal Light	LED	LED



## » Back Bars



BA-ALU Models with aluminum door frames, BA-S/A Models with stainless steel body and aluminum door frame



All Models available with mirror polished stainless steel interior

### BASH

- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



### BA15H S/A

- SS430 stainless steel exterior
- Aluminum door frame
- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves



### BA25H ALU

- Aluminum door frames
- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 2 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	BA5H	BA15H	BA25H	BA25S
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	100	122	191	191
Net Volume, l	94	116	183	183
Cans, 330 ml	138	161	270	240
Cans, 500 ml	96	112	188	168
Bottles, 500 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	500x520x670	600x520x670	900x520x670	900x516x670
Internal Dimensions, WxDxH	410x450x720	510x450x720	810x450x720	810x450x720
Doors	1 hinged glass	1 hinged glass	2 hinged glass	2 sliding glass
Shelves/Baskets	2, 398x235	2, 498x235	4, 330x295	4, 330x295
Outer Body	Black or SS430	Black or SS430	Black or SS430	Black or SS430
Interior	Stucco Alu. or Mirror steel	Stucco Alu. or Mirror steel	Stucco Alu. or Mirror steel	Stucco Alu. or Mirror steel
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	210	210	220	220
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	46	48	66,4	66,4
Net Weight, kg	44	46	64,4	64,4
Noise Level, dB(A)	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	76	76	140	140
Internal Light	LED	LED	LED	LED
Option: Charged with R600a				



## » Back Bars



BA20S

- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 4 Adjustable shelves
- Adjustable feet



BA30S-2

- Interior LED light
- Fan assisted cooling
- 2 Double glazed doors
- 2 Adjustable shelves behind each door
- Door holders for easier loading of cabinet
- Adjustable feet



BA30S-3

- Interior LED light
- Fan assisted cooling
- 3 Double glazed doors
- 2 Adjustable shelves behind each door
- Door holders for easier loading of cabinet
- Adjustable feet

### Technical specifications

Model	BA20S	BA30S-2	BA30S-3
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	188	328	328
Net Volume, l	188	320	320
Cans, 330 ml	240	360	360
Cans, 500 ml	168	264	264
Bottles, 330 ml	156	240	240
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	800x415x900	1350x415x900	1350x415x900
Internal Dimensions, WxDxH	800x360x720	1257x360x720	1257x360x720
Doors	2 sliding glass	2 sliding glass	3 sliding glass
Shelves/Baskets	4, 330x395	4, 405x395	6, 405x395
Outer Body	Black	Black	Black
Interior	Stainless Aluminium	Stainless Aluminium	Stainless Aluminium
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	220	260	260
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	67,4	94	95
Net Weight, kg	65,4	91	92
Noise Level, dB(A)	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	140	186	186
Internal Light	LED	LED	LED
Option: Charged with R600a			



BA-S/A Models with stainless steel body and aluminum door frame



BA-ALU Models with aluminium door frames



All Models available with mirror polished stainless steel interior



## » Back Bars



### BA10H

- Interior LED light
- Fan assisted cooling
- Double glazed door
- 2 Adjustable shelves
- Adjustable feet



### BA20H

- Interior LED light
- Fan assisted cooling
- Double glazed doors
- 4 Adjustable shelves
- Adjustable feet



### BA30H

- Interior LED light
- Fan assisted cooling
- 3 Double glazed doors
- 2 Adjustable shelves behind each door
- Adjustable feet

### Technical specifications

Model	BA10H	BA20H	BA30H
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	124	198	328
Net Volume, l	118	188	320
Cans, 330 ml	161	270	425
Cans, 500 ml	112	188	298
Bottles, 330 ml	86	156	240
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	600x520x900	900x520x900	1350x520x900
Internal Dimensions, WxDxH	500x450x720	800x450x720	1257x450x720
Doors	1 hinged glass	2 hinged glass	3 hinged glass
Shelves/Baskets	2, 490x350	4, 330x350	6, 405x365
Outer Body	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Foot	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	210	220	260
Energy Consumption, kWh/24h	See www.tufcold.dk	See www.tufcold.dk	See www.tufcold.dk
Gross Weight, kg	49	67,4	94,8
Net Weight, kg	47	65,4	91,6
Noise Level, dB(A)	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N
Refrigerant	R134a	R134a	R134a
Charge, g	76	140	188
Internal Light	LED	LED	LED
Option: Charged with R600a			



BA-ALU Models with aluminium door frames, BA-S/A Models with stainless steel body and aluminium door frame



BA-HSD Models with solid doors



All Models available with mirror polished stainless steel interior



## » Back Bars



DB300H with 3 hinged doors available medio 2014

### DB125H

- Interior LED light
- Fan assisted cooling
- Double glazed door
- ABS door frame
- 2 Adjustable shelves
- Adjustable feet



### DB200H

- Fan assisted cooling
- 2 hinged doors
- 4 Adjustable shelves
- Adjustable feet



### DB200S

- Fan assisted cooling
- 2 sliding doors
- 4 Adjustable shelves
- Adjustable feet

### Technical specifications

Model	DB125H	DB200H	DB300H	DB200S
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	122	191	322	191
Net Volume, l	116	183	314	183
Cans, 330 ml	181	270	380	240
Cans, 500 ml	112	188	268	168
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	600x520x670	900x520x670	1350x520x670	900x514x670
Internal Dimensions, WxDxH	510x450x720	810x450x720	1257x450x720	810x450x720
Doors	1 hinged glass	2 hinged glass	3 hinged glass	2 sliding glass
Shelves/Baskets	2, 480x235	4, 395x230	6, 430x217	4, 395x230
Outer Body	Black	Black	Black	Black
Interior	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium	Stucco Aluminium
Castors/Feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Lock	Y	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	210	220	260	220
Energy Consumption, kWh/24h	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>	See <a href="http://www.tufcold.dk">www.tufcold.dk</a>
Gross Weight, kg	55	69	97	69
Net Weight, kg	53	65	92	65
Noise Level, dBA	45	45	45	45
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Mechanical	Mechanical	Mechanical	Mechanical
Thermometer	N	N	N	N
Refrigerant	R600a	R600a	R134a	R600a
Charge, g	55	185	186	65
Internal Light	LED	LED	LED	LED



## » Counter Bottle Coolers


**CBC210G**

- Fan assisted cooling
- 2 Glass doors
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet



Stainless steel shelves


**CBC310G**

- Internal LED light
- Fan assisted cooling
- 3 Glass doors
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet


**CBC410G**

- Internal LED light
- Fan assisted cooling
- 4 Glass doors
- Stainless steel interior
- 8 Adjustable stainless steel shelves
- Adjustable feet

### Technical specifications

Model	CBC210G	CBC310G	CBC410G
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	220	400	630
Net Volume, l	277	442	605
Cans, 330 ml	-	-	-
Cans, 500 ml	-	-	-
Bottles, 330 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	180x415x880	202x415x880	254x415x880
Internal Dimensions, WxDxH	180x415x780	182x415x780	218x415x780
Doors	2 hinged glass	3 hinged glass	4 hinged glass
Shelves/Baskets	4, SS304	6, SS304	8, SS304
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS304	SS304	SS304
Castors/Foot	6 adjustable feet	8 adjustable feet	10 adjustable feet
Lock	Y	Y	Y
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	135	161	190
Net Weight, kg	130	156	191
Noise Level, dB(A)	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	150	160	190
Internal Light	LED	LED	LED



## » Counter Bottle Coolers


**CBC220**

- Fan assisted cooling
- 1 Solid door
- 2 Drawers
- Stainless steel interior
- 2 Adjustable stainless steel shelves
- Adjustable feet



Combinations of drawers and doors are easily made as doors and drawers are provided as separate kits.


**CBC210**

- Fan assisted cooling
- 2 Solid doors
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet


**CBC240**

- Fan assisted cooling
- 4 Drawers
- Stainless steel interior
- Adjustable feet

### Technical specifications

Model	CBC210	CBC220	CBC240
Climate Class	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10
Gross Volume, l	290	290	290
Net Volume, l	277	277	277
Cans, 330 ml	-	-	-
Cans, 500 ml	-	-	-
Bottles, 500 ml	-	-	-
Bottles, 1,5 l PET	-	-	-
External Dimensions, WxDxH	1462x513x890	1462x13x890	1462x13x890
Internal Dimensions, WxDxH	1462x415x780	1462x415x780	1462x415x780
Doors	2 hinged solid	1 door, 2 drawers	4 drawers
Shelves/Baskets	4, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS304	SS304	SS304
Castors/Foot	6 adjustable feet	6 adjustable feet	6 adjustable feet
Lock	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tofcold.dk">www.tofcold.dk</a>	See <a href="http://www.tofcold.dk">www.tofcold.dk</a>	See <a href="http://www.tofcold.dk">www.tofcold.dk</a>
Gross Weight, kg	123	128	130
Net Weight, kg	118	123	128
Noise Level, dB(A)	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital
Thermometer	Y	Y	Y
Refrigerant	R134a	R134a	R134a
Charge, g	150	150	150
Internal Light	LED	LED	LED





## » Counter Bottle Coolers


**CBC320**

- Internal LED light
- Fan assisted cooling
- 2 Solid doors
- 2 Drawers
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet


**CBC310**

- Fan assisted cooling
- Solid doors
- Stainless steel interior
- 6 Adjustable stainless steel shelves
- Adjustable feet


**CBC360**

- Internal LED light
- Fan assisted cooling
- 6 Drawers
- Stainless steel interior
- Adjustable feet

### Technical specifications

Model	CBC310	CBC320	CBC340	CBC360
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	460	460	460	460
Net Volume, l	442	442	442	442
Cans, 330 ml	-	-	-	-
Cans, 500 ml	-	-	-	-
Bottles, 330 ml	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-
External Dimensions, WxDxH	202x245x130x80	202x245x130x80	202x245x130x80	202x245x130x80
Internal Dimensions, WxDxH	182x224x115x70	182x224x115x70	182x224x115x70	182x224x115x70
Doors	2 hinged solid	2 doors, 2 drawers	1 door, 4 drawers	6 drawers
Shelves/Baskets	6, SS304	4, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS304	SS304	SS304	SS304
Castors/Feet	8 adjustable feet	8 adjustable feet	8 adjustable feet	8 adjustable feet
Lock	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	143	148	153	158
Net Weight, kg	138	143	148	153
Noise Level, dB(A)	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	160	160	160	160
Internal Light	LED	LED	LED	LED



## » Counter Bottle Coolers


**CBC440**

- Internal LED light
- Fan assisted cooling
- 2 Solid doors
- 4 Drawers
- Stainless steel interior
- 4 Adjustable stainless steel shelves
- Adjustable feet


**CBC410**

- Internal LED light
- Fan assisted cooling
- 4 Solid doors
- Stainless steel interior
- 8 Adjustable stainless steel shelves
- Adjustable feet


**CBC480**

- Internal LED light
- Fan assisted cooling
- 8 Drawers
- Stainless steel interior
- Adjustable feet

### Technical specifications

Model	CBC410	CBC420	CBC440	CBC460	CBC480
Climate Class	N	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	630	605	630	605	630
Net Volume, l	605	605	605	605	605
Cans, 330 ml	-	-	-	-	-
Cans, 500 ml	-	-	-	-	-
Bottles, 330 ml	-	-	-	-	-
Bottles, 1,5 l PET	-	-	-	-	-
External Dimensions, WxDxH	2542x513x860	2542x513x860	2542x513x860	2542x513x860	2542x513x860
Internal Dimensions, WxDxH	2162x415x760	2162x415x760	2162x415x760	2162x415x760	2162x415x760
Doors	4 hinged solid	3 doors, 2 drawers	2 doors, 4 drawers	1 door, 6 drawers	8 drawers
Shelves/Baskets	8, SS304	6, SS304	4, SS304	2, SS304	0
Outer Body	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011	Black, RAL9011
Interior	SS430	SS430	SS430	SS430	SS430
Castors/Foot	10 adjustable feet	10 adjustable feet	10 adjustable feet	10 adjustable feet	10 adjustable feet
Lock	Y	Y	Y	Y	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	350	350	350	350	350
Energy Consumption, kWh/24h	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk	See www.tefcold.dk
Gross Weight, kg	172	177	182	187	192
Net Weight, kg	162	167	172	177	182
Noise Level, dB(A)	42	42	42	42	42
Type of Cooling	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost	Automatic	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a	R134a
Charge, g	190	190	190	190	190
Internal Light	LED	LED	LED	LED	LED

# » KEG Coolers



- CKC6**
- Ventilated cooling
  - 2 Solid doors
  - 6 x 20 l. KEG capacity
  - 1 x 50 l. KEG capacity
  - Stainless steel interior
  - Adjustable feet



- CKC2**
- Ventilated cooling
  - 1 Solid doors
  - 2 x 20 l. KEG capacity
  - Stainless steel interior
  - Adjustable feet



- CKC4**
- Ventilated cooling
  - 1 Solid doors
  - 4 x 20 l. KEG capacity
  - 1 x 50 l. KEG capacity
  - Stainless steel interior
  - Adjustable feet

## Technical specifications

Model	CKC2	CKC4	CKC6	CKC8
Climate Class	N	N	N	N
Temperature Range, °C	2 to 10	2 to 10	2 to 10	2 to 10
Gross Volume, l	80	100	220	302
KEG 20 l.	2	4	6	8
KEG 50 l.		1	1	2
External Dimensions, WxDxH	850x590x880	850x590x880	1100x590x880	1300x590x880
Internal Dimensions, WxDxH	210x500x730	520x500x730	720x500x730	860x500x730
Doors	1 hinged solid	1 hinged solid	2 hinged solid	2 hinged solid
Shelves/Baskets				
Outer Body	Black, RAL8011	Black, RAL8011	Black, RAL8011	Black, RAL8011
Interior	SS304	SS304	SS304	SS304
Castors/Feet	4 adjustable feet	6 adjustable feet	6 adjustable feet	8 adjustable feet
Lock	N	N	N	N
Voltage/Frequency, V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Input Power, W	250	250	250	250
Energy Consumption, kWh/24h	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>	See <a href="http://www.tefcold.dk">www.tefcold.dk</a>
Gross Weight, kg	63	80	93	104
Net Weight, kg	48	63	73	83
Noise Level, dBA	45	45	45	45
Type of Cooling	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost	Automatic	Automatic	Automatic	Automatic
Controller	Digital	Digital	Digital	Digital
Thermometer	Y	Y	Y	Y
Refrigerant	R134a	R134a	R134a	R134a
Charge, g	120	150	150	150
Internal Light	N	N	N	N

## » KEG Coolers



Well suited for custom decoration

### CKC50

- Ventilated cooling
- 1 Solid doors
- 2 x 20 L. KEG capacity
- 1 x 50 L. KEG capacity
- Stainless steel interior
- Rollers and lockable feet
- White exterior

Tap not included



CKC50

• With 50 L. KEG



Shelf for CO2 bottle

### Technical specifications

Model	CKC50
Climate Class	N
Temperature Range, °C	2 to 10
Gross Volume, l	177
Net Volume, l	150
KEG 20 L.	2
KEG 50 L.	1
External Dimensions, WxDxH	600x600x177
Internal Dimensions, WxDxH	520x520x175
Doors	1 hinged solid
Shelves/Baskets	2, 520x460
Outer Body	White
Interior	SS304
Castors/Feet	4 rollers and 2 adjustable feet
Lock	Y
Voltage/Frequency, V/Hz	220-240/50
Input Power, W	210
Energy Consumption, kWh/24h	See www.tefcold.dk
Gross Weight, kg	58
Net Weight, kg	53
Noise Level, dB(A)	42
Type of Cooling	Ventilated
Type of Defrost	Automatic
Controller	Electronic
Thermometer	Y
Refrigerant	R600a
Charge, g	-
Internal Light	N