


Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## Pizza Base EN60x40 counter 3 doors

Model: TZS17/1M-710

Cod: T40300000201

Pizza refrigerated base 3 doors, counter body height 710 mm, without top. Plug-in refrigeration unit, B energetic class, 5 heavy duty climatic class and R290 ecological refrigerant gas. Temperature range -2°+8°C with ventilated refrigeration. Equipment: 12 pairs of slides for EN60x40 trays. Each compartment can be configured with refrigerated and neutral drawers. Anti-corrosion treated evaporator and hot gas defrosting. 60 mm insulation thickness - HFO with high insulation performance and low environmental impact (CFC, HCFC, HFC free). AISI 304 stainless steel handle and magnetic triple chamber door gasket, easily replaceable. Reversible, self-closing door opening with 105° stop. AISI 304 stainless steel interior/exterior including external back. Rounded inner corners for easy cleaning. The reinforced modular base in colaminated steel allows installation on wheels, feet, mobile or masonry plinths. Replaceable refrigerant system FSS - Fast Service System - for quick and easy service. Prepared for connection to Cosmo - wi-fi remote supervision system - and ModBus/RTU Rs485 connection.

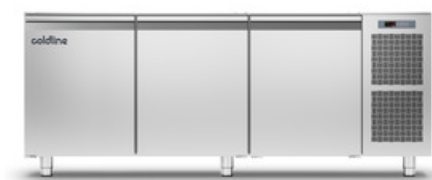

### Technical data

|                          |                                 |
|--------------------------|---------------------------------|
| Top:                     | Without top                     |
| Gross capacity:          | 607 lt                          |
| Temperature range:       | -2°+8°C                         |
| Refrigerant unit:        | Plug-in                         |
| Energetic class:         | B                               |
| Energy efficiency index: | 31                              |
| Annual consumption:      | 858 kW/h annum                  |
| 24h consumption:         | 2,351 kW/h/24h                  |
| Climate class:           | 5                               |
| Cooling gas:             | R290 (GWP=3)                    |
| Refrigerant Charge:      | 110g                            |
| Defrost:                 | Hot gas                         |
| Body height:             | 710 mm                          |
| Valve:                   | Supplied standard with solenoid |
| Dimensions:              | 2005×780×810 mm                 |
| Packing dimensions:      | 2100×900×998 mm                 |
| Net / gross weight:      | 145 Kg / 155 Kg                 |
| Net / gross volume:      | 382 lt / 607 lt                 |
| Voltage:                 | 220-240 V - 50 Hz               |
| Total rate:              | 250W - 1,15A                    |
| Cooling capacity:        | 406 W*                          |
| *:                       | Evap. -10°C Cond. +55°C         |

### Features

|                              |                                                        |
|------------------------------|--------------------------------------------------------|
| Standard equipment:          | 12 slides EN60x40                                      |
| Control:                     | Electronic, display flush with the panel               |
| Doors:                       | 3 doors, self-closing, reversible with 105° stop       |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable        |
| Insulation:                  | 60 mm thickness - CFC/HCFC free                        |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel.        |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                   |
| Racks and slides:            | Stainless steel AISI 304                               |
| Feets:                       | AISI 304 stainless steel adjustable h 100/150 mm       |
| Cosmo:                       | Predisposed for Cosmo Hub connection                   |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.


## Accessories and variants

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Drawers 1/2                        | Granite top 2005 mm                         |
| Drawers 1/3                        | Adjustable feet h 145/195 mm                |
| Drawers 1/3 + 2/3                  | 6 Swivel and brake castors h 128 mm         |
| Lock with key for drawer 1/2       | Frame fitted with telescopic EN60x40 slides |
| Lock with key for drawer 1/3       | EN60x40 Pizza container h 60 mm             |
| Lock with key for drawer 1/3 + 2/3 | Aluminium coated backingan EN60x40 h 20 mm  |
| Plug-in water unit                 | Pair of type L slides 605 mm                |
| Alimentazione frequenza 60Hz       | Serial interface, RS485 cable               |
| Other special voltage              | Cosmo cable connection kit                  |
| 7 Neutral drawers h 710 mm         | Cosmo wifi connection kit                   |
| 3+1 Neutral drawers h 710 mm       | IP44 schuko socket with cover               |
| 1+1 Neutral drawers h 710 mm       | Removable plinth EN 3D h 100 mm             |

## COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows Coldline, Modular and Nevo appliances to be connected and monitored from a smartphone. The counter, connected with Cosmo kit via cable to a Cosmo hub (MODI, VISION, THAW.PRO, LEVTRONIC, QUBI) or with Cosmo Wi-Fi kit, can be monitored by the CosmoApp and receive alerts in case of abnormal operation.

## Technical draw

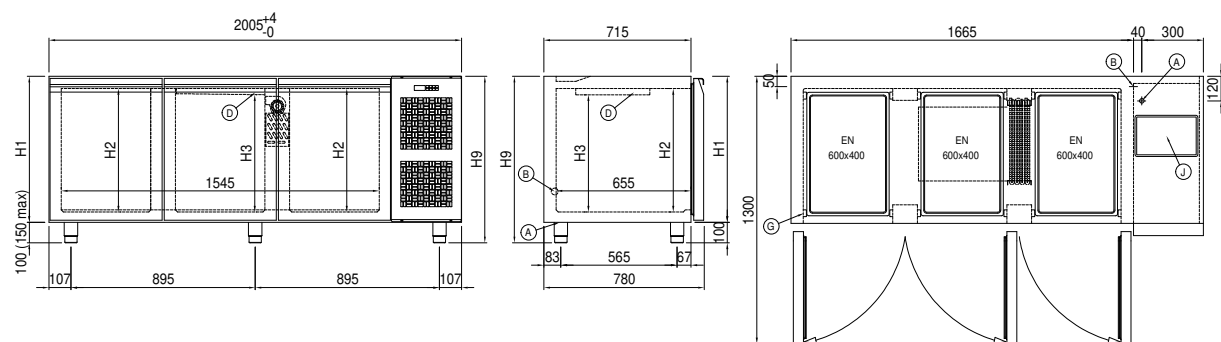

|    |                           |    |                                           |    |                  |
|----|---------------------------|----|-------------------------------------------|----|------------------|
| A: | Power supply cable outlet | B: | Condensation water drain                  | D: | Airflow conveyor |
| G: | Racks pitch               | J: | Automatic evaporation of condensing water |    |                  |