

Code: **W10TGN**

Model: **W111000000**

Exterior/interior finishing:

- Stainless steel AISI 304 18/10

Insulation:

- 60 mm thickness - CFC/HCFC free

Cover evaporator:

- Removable in stainless steel AISI 304 Cr-Ni 18/10

Interior:

- Structure in stainless steel wire AISI 304 Cr-Ni 18/10

Inner corners:

- Rounded corners ensuring maximum hygiene

Feet:

- Stainless steel AISI 304 adjustable 100-150 mm

Door:

- Self-closing, with 105° dwell

Door frame:

- Anti-condensation system

Door handle:

- Stainless steel AISI 304 thick 2 mm

Door gasket:

- Magnetic, easy to replace

Top:

- Reinforced overlap oven

Electrical panel:

- Pull-out





Constructional data





• Dimensions	780×800×1545 mm
• Packing dimensions	800×830×1600 mm
• Net weight	140 kg
• Blast chilling yield +90°+3°C	40 kg
• Deep-freezing yield +90°-18°C	28 kg
• Cooling capacity	5211 W*
• Standard connection	400 V 3 N - 50 Hz
• Total rate	3345 W - 6,2 A
• Cooling gas	R404a
• Blast chilling/deep-freezing mode	With core probe and at preset time
• Standard equipment	N. 10 pair of slides GN1/1 Pitch 75 mm Drain plug
• *Evap. -10°C cond. 45°C	


Features


 Plastic coated shelf EN 600×400 mm
Code O222400600

 Pair of slides type L - 402 mm GN/EN
Code O121240220

 HACCP recorder for Blast Chillers/Freezers
Code O842000040

 Kit Sterilizing UV lamp for Blast Chillers/Freezers
Code O923200020

 Kit heated needle probe for Blast Chillers/Freezers
Code O923100020

 Kit of 4 swivel and brake castors in stainless steel AISI 304
Code O444000020

Accessories

Coldline made major investments in design research, becoming a leader in technology and innovation. Each cabinet marked with the FSSsymbol is equipped with a refrigeration system independent of the structure, which provides improved flexibility and service.



FSS • FAST SERVICE SYSTEM

- You can change the intended use of an appliance, a freezer into a chiller - and the other way around - even after years of installation.
- You can extend the life of a refrigeration cabinet by replacing its old refrigeration system with a new one.
- Maintenance and service are simple, quick and do not require specialised personnel.

FSS • Fast Service System

NO-COMPROMISE QUALITY STEEL

AISI 304

AISI 304 18/10 is a high quality steel. Its stability guarantees good-looking and durable products, ensuring maximum hygiene and corrosion resistance over time.

HOT GAS DEFROST



To defrost in a few minutes at the end of each cycle. Maximum efficiency conditions are restored in the next cycle to avoid waste of energy.

HIGH-EFFICIENCY FANS



They allow for a 30% energy saving compared to the traditional version.

INSULATION THICKNESS

60 mm

The 60 mm thick insulation ensures lower heat loss, reduced work of the compressor, therefore lower energy consumption.

CORE PROBE




It makes the compressor run only for the time strictly necessary.

ASPERA COMPRESSORS



Aspera compressors reduce energy consumption by 15% and acoustic impact by 5 dBA.

Focus

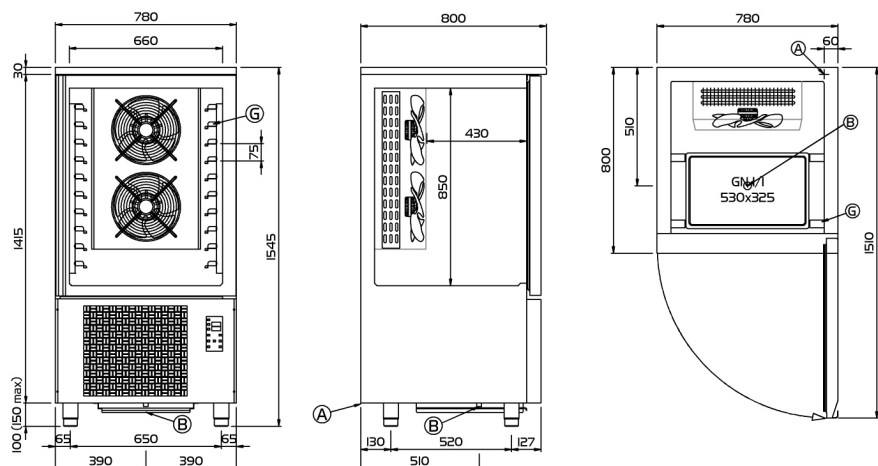

(A) POWER SUPPLY CABLE OUTLET

(B) SCARICO CONDENZA CON VASCETTA RACCOLTA ESTRAIBILE

(C) RACKS PITCH



Technical drawing

