

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## Modi Up Roll-in Blast Chiller

Model: W20KUE-R452

Cod: W22203000001



### Technical data

|                     |                            |
|---------------------|----------------------------|
| Gross capacity:     | 977 lt                     |
| Temperature range:  | -40°+10°C                  |
| Ventilation range:  | 25% - 100%                 |
| Humidifier:         | Not available              |
| Refrigerant unit:   | Plug-in                    |
| Yield +90/+3:       | 88 Kg                      |
| Yield +90/-18:      | 62 Kg                      |
| Climate class:      | 5                          |
| Cooling gas:        | R452a (GWP=2.141)          |
| Refrigerant Charge: | 5000g                      |
| Defrost:            | Forced air                 |
| Valve:              | Electronic expansion valve |
| Dimensions:         | 810×1015×2240 mm           |
| Packing dimensions: | 905×1130×2365 mm           |
| Net / gross weight: | 230 Kg / 240 Kg            |
| Net / gross volume: | / 977 lt                   |
| Voltage:            | 400-415 V - 50-60 Hz       |
| Total rate:         | 6450 W - 12,45 A           |
| Cooling capacity:   | 7751 W*                    |
| *:                  | Evap. -10°C Cond. +45°C    |

### Features

|                              |                                                                         |
|------------------------------|-------------------------------------------------------------------------|
| Functions:                   | Blast chilling, shock freezing, continuous cycle                        |
| Control:                     | 4,3" touch screen display with USB port                                 |
| Doors:                       | Cushioned, with anti-odor system                                        |
| Door gasket:                 | Magnetic, triple chamber and easily replaceable                         |
| Core probe:                  | Needle probe with 1 reading point, quick-release and easily replaceable |
| Insulation:                  | 75 mm thickness - CFC/HCFC free                                         |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel.                         |
| Inner corners:               | Rounded for easy cleaning and ensuring maximum hygiene                  |
| Handle:                      | Stainless steel AISI 304, 2 mm thick                                    |
| Racks and slides:            | Stainless steel AISI 304, quick release                                 |
| Cosmo:                       | Wi-Fi remote control system                                             |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.


### Accessories and variants

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| RAL customisable colouring                     | Alimentazione Trifase 50Hz oppure 60Hz   |
| Sonda al cuore a 3 punti di lettura            | Alimentazione frequenza 60Hz             |
| Sonda al cuore riscaldata a 1 punto di lettura | Other special voltage                    |
| Reverse door opening from standard             | Trolley EN60x40 20 trays 620x470x1630 mm |
| Alimentazione Monofase 50Hz oppure 60Hz        | Sterilizing UV lamp                      |

### COSMO - wi-fi control

Cosmo is The Nice Kitchen's exclusive Wi-Fi technology that allows MODI blast chillers to be connected, updated and monitored from smartphones. MODI is also a Cosmo hub and allows remote supervision of the Coldline appliances connected to it. From the CosmoApp you can check the operating conditions of each machine and receive alerts in the event of abnormal operation.

### Technical draw

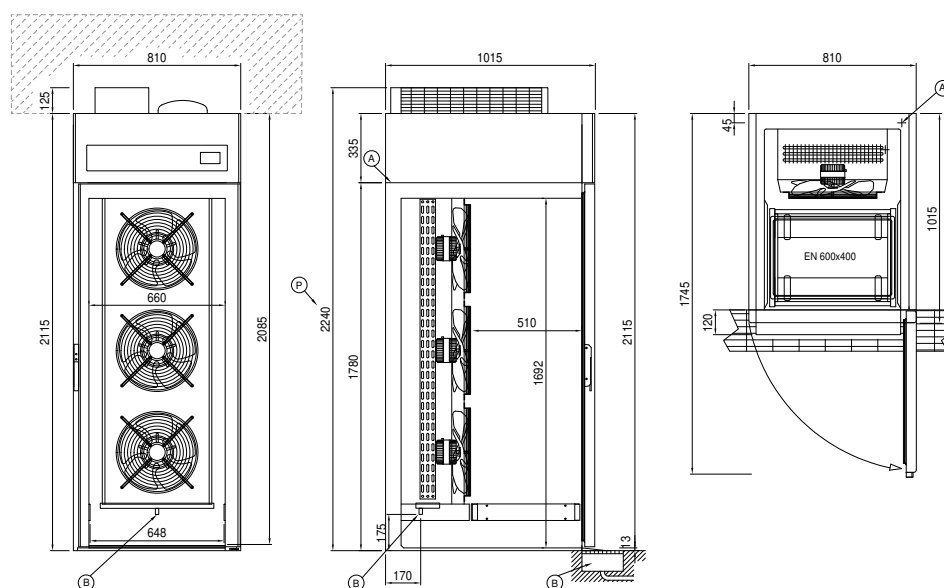

A: Power supply cable outlet

B: Condensation water drain

Q: Plug-In

R: Gas output pipes