
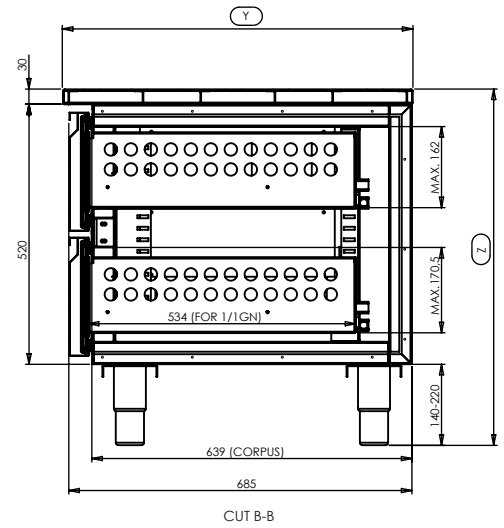


CUT B-B

SELF CONTAINED	GN1	GN2	GN3	GN4	GN5
Outside dimension X Without aggregate	536	866	1300	1732	2130
Outside dimension X With standard aggregate	866	1196	1630	2062	2460
Outside dimension Y(depth) x Z(height)	700 x 460 + (140-220)				
SPL (distance 1m)	35 - 50 dB(A)				
Temperature	+1°C ~ +6°C				
Cooling medium	R600	R290	R290	R290	R290
Insulation	45mm				
Voltage	1, N, PE ~ 230V, 50Hz				
Power input	0,1kW	0,15kW	0,22kW	0,24kW	0,28kW
Refr. capacity (evap. @ -10°C)	0,13kW	0,17kW	0,28kW	0,35kW	0,42kW

REMOTE	GN1	GN2	GN3	GN4	GN5
Outside dimension X With control panel	716	1046	1480	1912	2340
Outside dimension Y(depth) x Z(height)	700 x 460 + (140-220)				

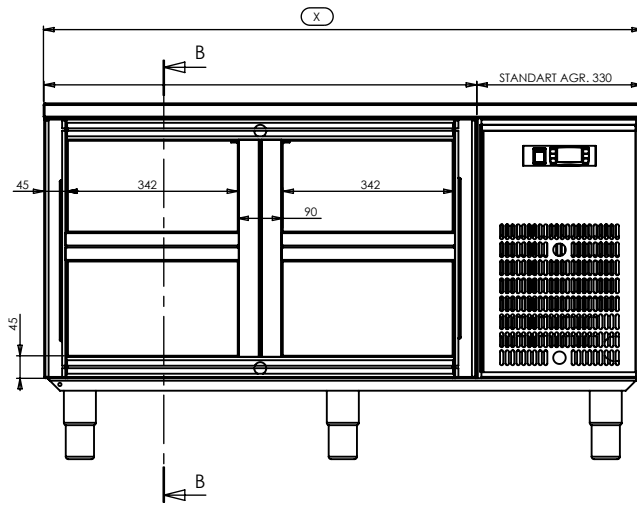

SELF CONTAINED	GN1	GN2	GN3	GN4	GN5
Outside dimension X Without aggregate	536	866	1300	1732	2130
Outside dimension X With standard aggregate	866	1196	1630	2062	2460
Outside dimension Y(depth) x Z(height)	700 x 520 + (140-220)				
SPL (distance 1m)	35 - 50 dB(A)				
Temperature	+1°C ~ +6°C				
Cooling medium	R600	R290	R290	R290	R290
Insulation	45mm				
Voltage	1, N, PE ~ 230V, 50Hz				
Power input	0,1kW	0,15kW	0,22kW	0,24kW	0,28kW
Refr. capacity (evap. @ -10°C)	0,13kW	0,17kW	0,28kW	0,35kW	0,42kW

REMOTE	GN1	GN2	GN3	GN4	GN5
Outside dimension X With control panel	716	1046	1480	1912	2340
Outside dimension Y(depth) x Z(height)	700 x 520 + (140-220)				
Voltage	1, N, PE ~ 230V, 50Hz				
Power input	0,1kW	0,1kW	0,1kW	0,1kW	0,1kW