
## OPTIMA 850 / 700

## **Review of optional accessories**





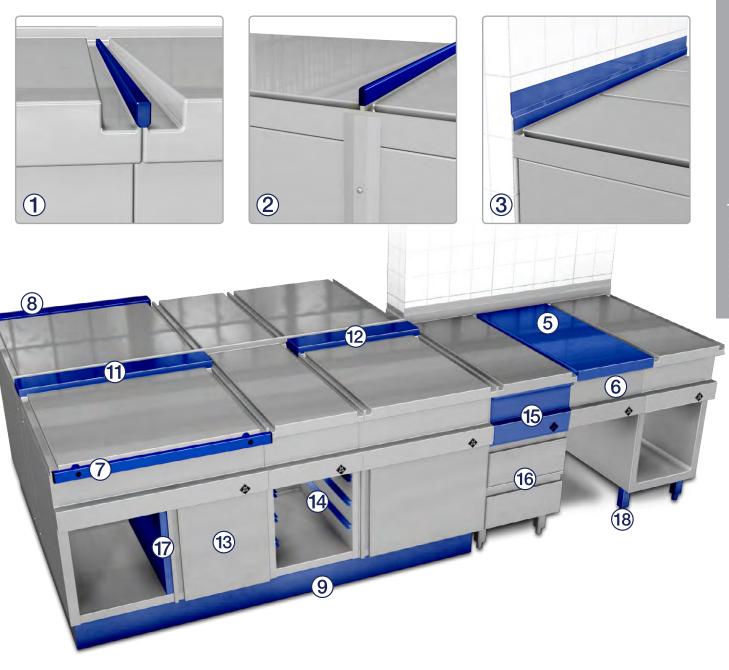

## **Optional accessories**

No. (pls. see p. 105)	Model No.	Description	Amount / width	Price
Optional	accessor	ies for block and row installation (necessary)		
1.	945001	Special connection profile, for lateral connection of 2 Optima 850 appliances	1 piece	
	945209	<b>Special connection profile,</b> for lateral connection of Optima 850 tilting frying pan without side columns to other Optima 850 appliances	1 piece	
	945021	Special connection profile, for lateral connection of 2 Optima 700 appliances	1 piece	
2.	945055	<b>Terminal strip,</b> for block installation for tight fitting over the rear edge of the appliance	Per running meter	
3.	975150	<b>Wall profile,</b> for rear wall connection, running z. profile dowelled to rear wall, 75 mm high	Per running meter	
4.	845211	$\textbf{Covering strip,} \ \text{for lateral connection in block installation, 1 x per front, 35 mm} \\ \text{wide, and incl. angle mountings}$	1 piece	
Optional	accessor	ies for block and row installation (on demand)		
5.	845001	Work top, installed between 2 Optima 850 appliances (no connection profiles needed)	Up to 300 mm width	
			Per further 100 mm	
	845416	Work top, installed between 2 Optima 700 appliances (no connection profiles needed)	Up to 300 mm width	
			Per further 100 mm	
6.	845011	Front panel, only together with work top. (5)	Up to 300 mm width	
			Per further 100 mm	
=WA_	10031829	Front panel for OPTIMA 850/700 work table 200 mm	1 piece	
4	10031832	Front panel for OPTIMA 850/700 work table 300 mm	1 piece	
7.	845141	Handrail, 20 x 40 mm pipe	Per running meter	
8.	845421	<b>Shelf,</b> for extension of appliance surface, tube 80 x 40 mm	Per running meter	
9.	9109141	Plinth panel, height adjustable, screw on (for 150 mm appliance feet)	Per running meter	
10.	845121	Cover, with side panels for block installation (choice of length and width)		
	9109140	Continuous rear cover panel for several appliances (max. 2800 mm in one piece)	Per running meter	
11.		Cover extension, for installation of Optima 700 in a line with Optima 850 appliances		
	845441	Construction: connection on the left	400 mm width	
			Per further 100 mm	
	845446	Construction: connection on the right	400 mm width	
			Per further 100 mm	
12.	845451	Construction: connection between 2 appliances	400 mm width	
			Per further 100 mm	
		Rear cover panel cutouts for connection from the backside	1 piece	
		Plinth cover panel for plinth installation to close the appliance base when front protrusion is more than 90 mm	Per running meter	
		p. d. d. d. moro dian do min		

## OPTIMA 850 / OPTIMA 700 | Optional accessories

No. (pls. see p. 105)	Model No.	Description	Amount / width	Price				
Optional accessories for the appliances								
13.		Wing door(s), with fitting and magnet						
	845031	For appliance width 400 mm	1 piece					
	845866	For appliance width 500 mm	1 piece					
	845036	For appliance width 600 mm	1 piece					
	845041	For appliance width 800 mm	2 piece					
	845051	For appliance width 1200 mm	2 piece					
14.	845646	Rails 1/1 GN-100, (for appliance width 400 mm)	3 inserts					
14.	845647	Rails 1/1 GN-100, (for appliance width 500 mm)	3 inserts					
14.	10021929	Rails 1/1 GN-100, (for work table 600 mm)	3 inserts					
		<b>Drawers,</b> installation set (dividing wall (18) is only needed for 600 mm appliance length)						
15.	845666	1 Box drawer in upper structure (for 400 mm width)						
16.	845656	2 Box drawer in substructure (for 400 mm width)						
15.	845668	1 Box drawer in upper structure (for 500 mm width)						
16.	845658	2 Box drawer in substructure (for 500 mm width)						
15.	845667	1 Box drawer in upper structure (for 600 mm width)						
16.	845657	2 Box drawer in substructure (for 600 mm width)						
17.	975155	Dividing wall, side wall in connection with mountings (Optima 850)	1 piece					
	975390	Dividing wall, side wall in connection with mountings (Optima 700)	1 piece					
		Interface for connection to an <b>energy optimization system</b> according to DIN 18875, on demand potential free contact (in part contactors on site)	1 user					
		Potential free contact (e. g. signal annunciator)						
		Sockets for work tables, industrial deep fat fryers						
18.	204352	Appliance foot, 150 mm high, pluggable +/- 15 mm height adjustable (4 feet)	1 set					
18.	204252	Appliance foot, 200 mm high, pluggable +/- 15 mm height adjustable (4 feet)	1 set					
	10011639	Appliance on castors Optima 850 (4 pieces)	1 set					
	10011638	Appliance on castors Optima 700 & HotLine (4 pieces)	1 set					

Not all options and accessories are available for every appliance. Please contact the MKN Sales team should you have any further questions.

