



Model	Volume, l	°C	Input	Power
FP0-P101-94/70/90	232	+2 ... +8	1,8 A	410 W
FP0-V101-94/70/90	232	-5 ... +5	1,8 A	410 W
FP0-M101-94/70/90	232	-20 ... -18	2,3 A	529 W
FP0-P111-94/70/90	232	+2 ... +8	1,8 A	410 W
FP0-V111-94/70/90	232	-5 ... +5	1,8 A	410 W
FP0-M111-94/70/90	232	-20 ... -18	2,3 A	529 W
FP0-P121-94/70/90	232	+2 ... +8	1,8 A	410 W
FP0-V121-94/70/90	232	-5 ... +5	1,8 A	410 W
FP0-M121-94/70/90	232	-20 ... -18	2,3 A	529 W



STANDARD FEATURES

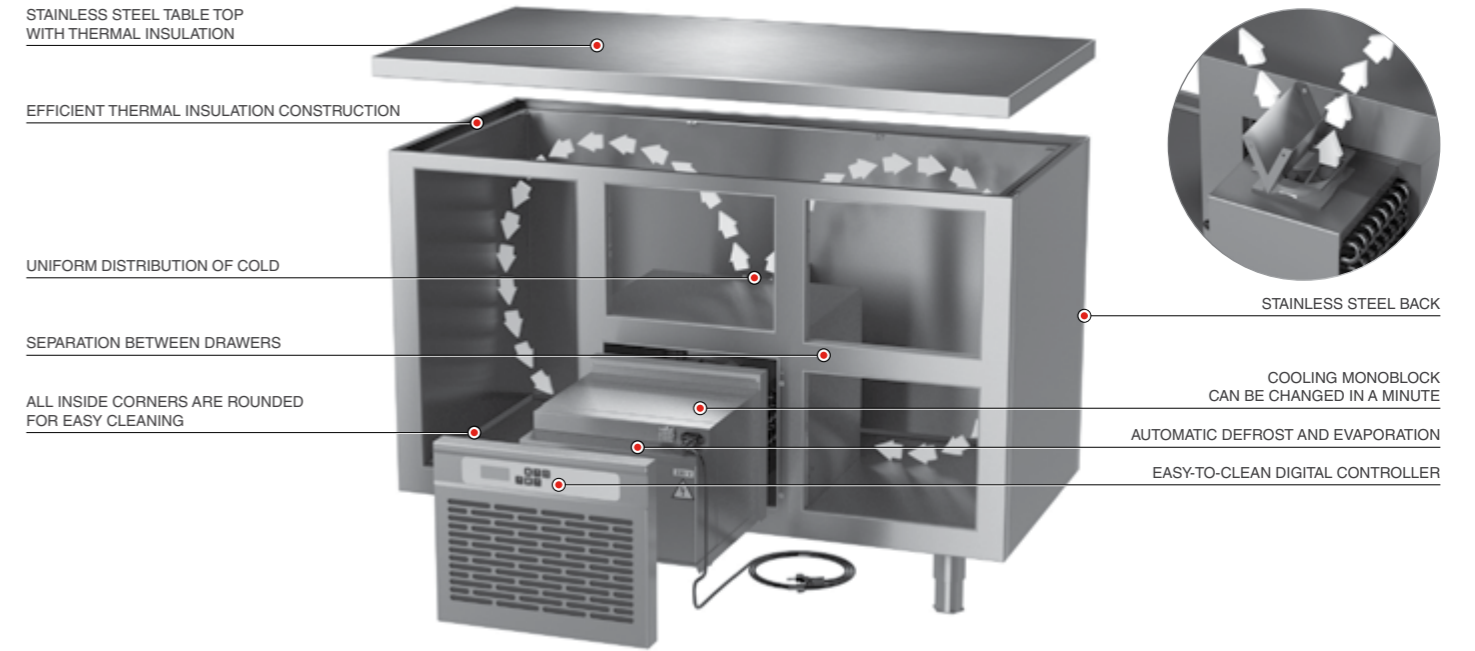

ACCESSORIES

<p>Stainless steel grids Code: K-DMLG-530x325</p>	<p>Without table top Code: F00-000-10.00 SB</p>
<p>Extra pair of stainless steel guides Code: F00-010-20.10</p>	<p>Granite table top: 30 mm thickness Code: MG</p>
<p>Rear upstand for the table top Code: FP0-000-12.00 SB</p>	<p>Extended warranty (covers replacing faulty parts) Code: Z-Service</p>

More technical information on last pages.
Customised equipment is available. Examples on last pages.