



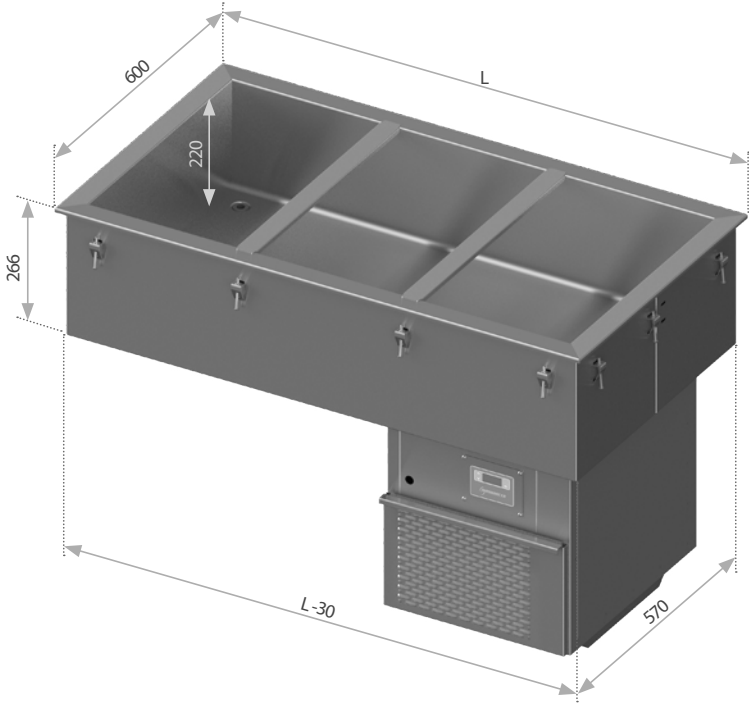


Length L, mm		Model		Cut out (mm)
395		UCG1-40/60/56		380 x 580
740		UCG2-74/60/56		725 x 580
1080		UCG3-108/60/56		1065 x 580
1425		UCG4-143/60/56		1410 x 580


Model:	UCG1	UCG2	UCG3	UCG4
Working temperature:	+2 ... +8 °C	+2 ... +8 °C	+2 ... +8 °C	+2 ... +8 °C
Input:	1,6 A	1,6 A	2,3 A	2,6 A
Power:	360 W	360 W	530 W	590 W
Voltage/frequencies:	230-240 V / 50 Hz			
Cooling type:	Static			
Refrigerant:	R290	R290	R290	R290
GN:	1 GN 1/1	2 GN 1/1	3 GN 1/1	4 GN 1/1

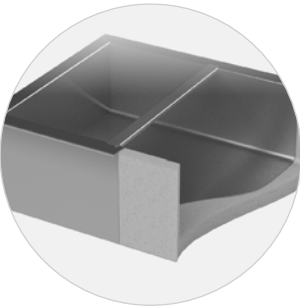

Efficient thermal insulation construction



DROP-IN (easily fits on table top)



Remote control
Easy-to-clean digital controller with adjustable temperature (+2 ... +8 °C)



Condensate evaporator pan