

MP 550 Ultra



Easy Plug




D

Pan capacity

up to 200 litres

▶ Specially designed for intensive use in commercial/institutional catering

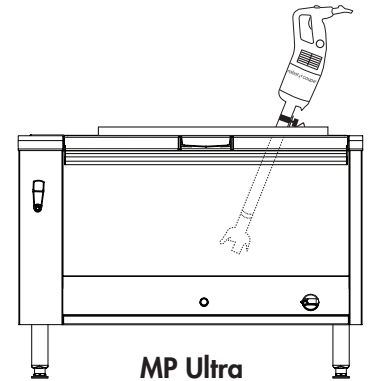

MP Ultra

A

SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

B

TECHNICAL DESCRIPTION

MP 550 Ultra stick blender. Single phase. Power: 750 W. Speed: 9,000 rpm. 100% stainless-steel blades, bell and tube (total length: 550 mm). "Easy Plug" system featuring detachable power cord

C

TECHNICAL DATA

Output power	750 W	
Electrical datas	Single phase - Plug supplied	
Speed	9,000 rpm	
Rate of recyclability	95%	
Net weight	5.2 kg	
	Supply	Amperage Reference
	220-240/50-60/1	3.5 Amp 34820
	240V/50/1 UK plug	3.5 Amp 34821
	120V/60/1	6.5 Amp 34825

E

CHARACTERISTICS AND BENEFITS

MOTOR UNIT

- Power 750 W
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness
- Lug on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Speed 9,000 rpm
- Self-regulating speed system
- New patented "Easy Plug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

TUBE AND BELL

- 100% stainless-steel blades, bell and tube (total length: 550 mm).
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe)
- Watertight bell design for optimum lifespan

STANDARD ATTACHMENTS

- Wall-mounted stick blender holder
- Tool for fixing and detaching the blades

STANDARDS


EN 12100-1 & 2-2004, EN 60204-1-2006, EN 12853, EN 60529-2000 : IP55 & IP34



# MP 550 Ultra

**F** OPTIONAL ATTACHMENTS

- 3 adjustable stainless-steel pan supports:
  - Ref. 27363 – for pans with a diameter of 330 650 mm
  - Ref. 27364 – for pans with a diameter of 500 1000 mm
  - Ref. 27365 – for pans with a diameter of 850 1300 mm
- 1 universal pan support:
  - Ref. 27354 – screws onto pan rim



**G** DRAWINGS & DIMENSIONS

Power cord and plug supplied

