


# MYHRVOLD-GRUPPEN

Corner conveyor	Dimensions [mm] (w x d x h)	Version
Corner conveyor, 90°	792 x 792 x 900	90°, L-R, R-L
Connection kit for 180°-version	-	180°, L-R, R-L

## Technical details

- Deepdrawn bottom plate (1.0 mm) and base frame (1.5 mm) made from stainless steel; connection to on-site drain system DN 40
- Robust base frame made from 40 x 40 mm stainless steel profiles
- Adjustable feet (plastic), +35 / -10 mm (in hygienic design according to NSF)
- Rack transport by ratchets
- Mechanically driven by dishwasher's drive mechanism
- 180°-version consisting of two corner conveyors 90° plus connection kit (independend from running direction)
- Corner conveyor can be operated either on the inlet or on the outlet of the CTR

## CTR, MTR – type 766–767

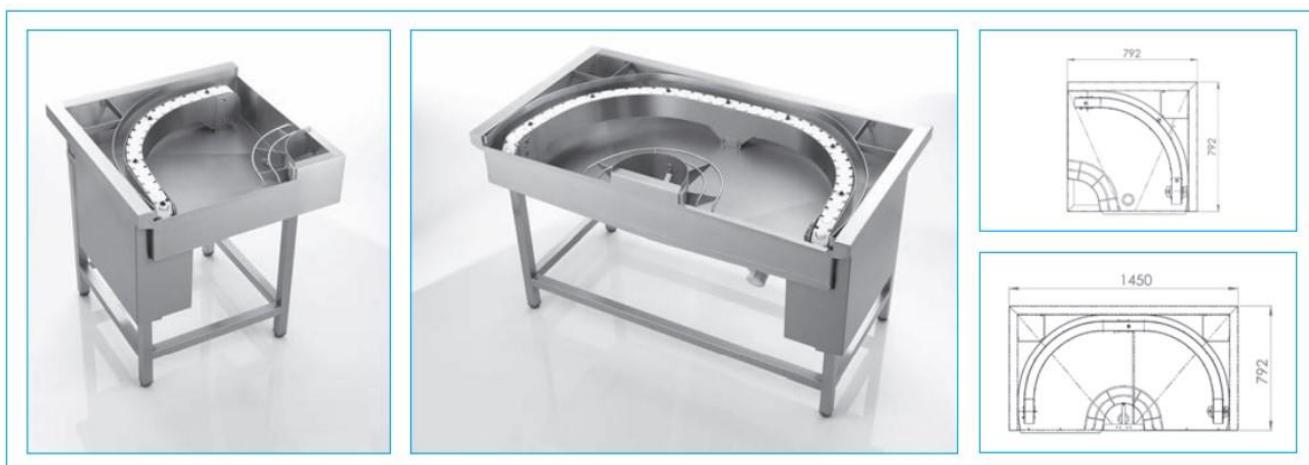


The corner conveyors are available in either 90° or 180° versions and can be used in the draining area of the dishwashing machine. Within the MTR Series they can also be used in the inlet area. The rack conveyor transport is realized by using a link chain.

Corner conveyor	Dimensions [mm] (w x d x h)	Version	Article no.
Corner conveyor, 90°	792 x 792 x 900	90°, L-R	766V9999
Corner conveyor, 90°	792 x 792 x 900	90°, R-L	766V9999
Corner conveyor, 180°	1,450 x 792 x 900	180°, L-R	767V9999
Corner conveyor, 180°	1,450 x 792 x 900	180°, R-L	767V9999

WINMTR-1030  
WINMTR-1031  
WINMTR-1032  
WINMTR-1033  
WINMTR-1034  
WINMTR-1035  
WINMTR-1036  
WINMTR-1037

Winterhalter 400 V motorisert sving 90 ° H-V  
Winterhalter 400 V motorisert sving 90 ° V-H  
Winterhalter 230 V motorisert sving 90 ° H-V  
Winterhalter 230 V motorisert sving 90 ° V-H  
Winterhalter 400 V motorisert sving 180 ° H-V  
Winterhalter 400 V motorisert sving 180 ° V-H  
Winterhalter 230 V motorisert sving 180 ° H-V  
Winterhalter 230 V motorisert sving 180 ° V-H

# MYHRVOLD-GRUPPEN

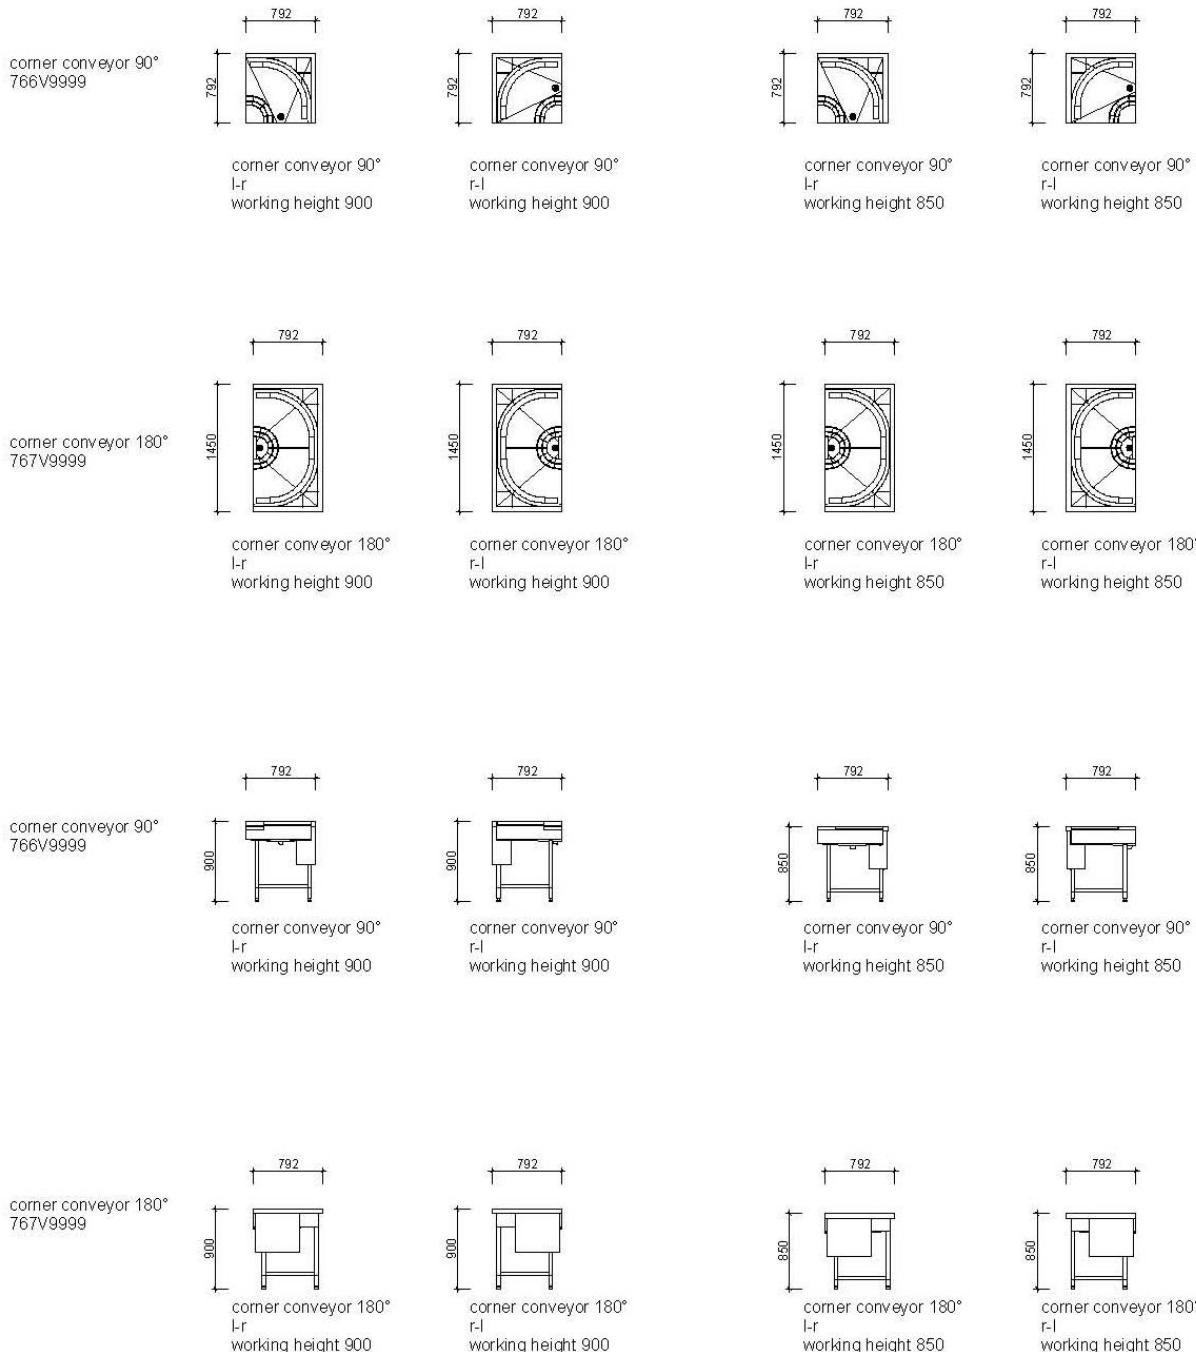

Disse svingene henter strøm (0,2kW) fra tunellmaskinen og skal ikke ha egen tilførsel.

**Winterhalter mekaniske svinger uten motor kan kun brukes til CTR og ikke til MTR maskinene.**

De finnes kun som 90° grader sving som leveres flatpakket og monteres

WIN765V0001

WIN75004357

Winterhalter mekanisk sving 90° kun for CTR

Winterhalter sammenkobling for 2x90° sving for CTR

Motoriserte og mekaniske svinger har samme mål (tegning vedlagt).

Arbeidshøyde justeres opp til 900mm.

winterhalter®