

Client	Quantity
Project	Position

Master GN counter 2 doors

Model: TP13/1MR-760 **Cod:** T10211000202



Technical data

Тор:	Withtop
Gross capacity:	303 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Remote
Defrost:	Electric
Body height:	760 mm
Valve:	Supplied standard with solenoid
Dimensions:	1090×700×900 mm
Packing dimensions:	1395×800×1040 mm
Gross weight:	111 Kg
Voltage:	220-240 V - 50-60 Hz
Total rate:	810 W
Absorbed Current:	3,7 A
Cooling capacity:	519 W*
*•	Evap10°C Cond. +55°C

Remote unit technical data

Voltage:	220-240 V - 50 Hz
Cooling gas:	R452A
Gross weight:	17 Kg
Dimensions:	450x300x270 mm
Packing dimensions:	470x330x300 mm
Cooling capacity:	Evap10°C Cond. +55°C

Features

2 slides GN1/1, 2 plastic coated GN1/1 shelves Electronic, display flush with the panel 2 doors, self-closing, reversible with 105° stop Magnetic, triple chamber and easily replaceable
panel 2 doors, self-closing, reversible with 105° stop Magnetic, triple chamber and easily
105° stop Magnetic, triple chamber and easily
,
Геріассавіс
60 mm thickness - CFC/HCFC free
Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel.
Rounded for easy cleaning and ensuring maximum hygiene
Stainless steel AISI 304, 2 mm thick
Acciaio inox AISI 304
Stainless steel AISI 304, adjustable h

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.




COSMO - wi-fi control

Cosmo is the innovative wi-fi technology that allows to connect all Coldline appliances in the kitchen and monitor them constantly from your smartphone. Connect Master counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine in real time and receive any alerts in the event of power cuts or improper personnel interventions.



Technical draw

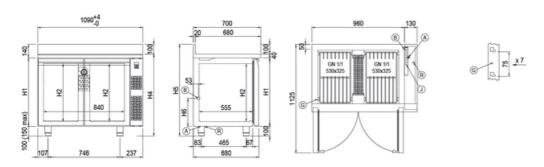

- **A:** Power supply cable outlet
- G: Racks pitch
- R: Gas output pipes

- B: Condensation water drain
- J: Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.